

# PATENT SPECIFICATION

1,062,610

DRAWINGS ATTACHED.

Inventor:—CHARLES GRENVILLE PARSONS.

Date of filing Complete Specification: Feb. 11, 1966.

Application Date: Nov. 19, 1964. No. 47188/64.

Complete Specification Published: March 22, 1967.

© Crown Copyright 1967.

Index at Acceptance:—F2 U(2A4A, 2A4C, 2E, 2J); B3 J15; B3 Q(2A8, 4); B3 U11.

Int. Cl.:—F 16 d /B 21 d, j.



## COMPLETE SPECIFICATION.

### Improvements relating to the Attachment of Components to Shafts.

We, STONE MANGANESE MARINE LIMITED, of Anchor and Hope Lane, London, S.E.7, a Company incorporated under the laws of Great Britain, do hereby declare the invention, for which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement:—

This invention concerns improvements relating to the attachment of components to shafts, especially but not exclusively marine propellers to propeller shafts. Another especially useful application is the attachment of drive pulleys to shafts. A particular object of the invention is to achieve an effective and reliable interference fit for the purpose of attaining a high torque-carrying capacity without the use of mechanical attachment or locking means.

According to the invention, interference between a component with a tapered or parallel hole and a shaft of complementary shape is produced by swelling the shaft within the said hole with the assistance of means comprising a pin which has a slight taper, suitably between 1 in 30 and 1 in 70, and is fitted into an axial bore having a like taper and extending in the shaft for substantially the length of fit between the said hole and shaft, the pin being provided at its outer end with a fine thread, which is engaged in a complementary thread in the bore, and being also provided with passages which communicate with grooves at the circumferential surface of the pin and through which hydraulic medium at high pressure is admitted at the same time as the pin is screwed into the bore. As the pin is screwed in simultaneously with the supply of the said medium, the latter is sealed within the bore to swell the shaft within the

hole in the component and give the required interference. When this interference, which can readily be determined by measurement in known manner, has been achieved, the hydraulic pressure is relieved, leaving the component attached to the shaft with a predetermined interference fit. To remove the component from the shaft, hydraulic pressure is applied through the pin and the pin is screwed out. The component can then be withdrawn from the shaft. Both for attachment and removal, the use of the hydraulic pressure ensures that only a relatively small moment is required for turning the pin and a conventional fine thread can be employed.

One manner of carrying the invention into effect will now be more fully described by way of example and with reference to the accompanying drawing, which is a longitudinal section through part of a shaft 1 and a component 2 attached thereto. The component 2 might be the hub or boss of a marine propeller, in which case the shaft 1 would be the propeller shaft. The component 2 might alternatively be the hub of a belt or chain pulley and the shaft 1 a driving or driven transmission shaft. The hub 2 is mounted with a tapered hole 3 on a tapered end portion 4 of the shaft 1.

Inside the tapered portion 4, the shaft 1 has a tapered axial bore 5 which accommodates a pin 6 having the same taper. A good machine finish should be provided on the bore 5 and pin 6. As illustrated, the tapered bore 5 runs into a cylindrical bore 7 extending through the shaft 1, but it may have a closed, radiused, inner end. At its outer end, the pin 6 is provided with a fine thread 8 which is screwed into a complementary thread in a recess 9 at the outer end of the bore 5. For turning the pin 6,


BEST AVAILABLE COPY

1062610

COMPLETE SPECIFICATION

1 SHEET

*This drawing is a reproduction of  
the Original on a reduced scale*

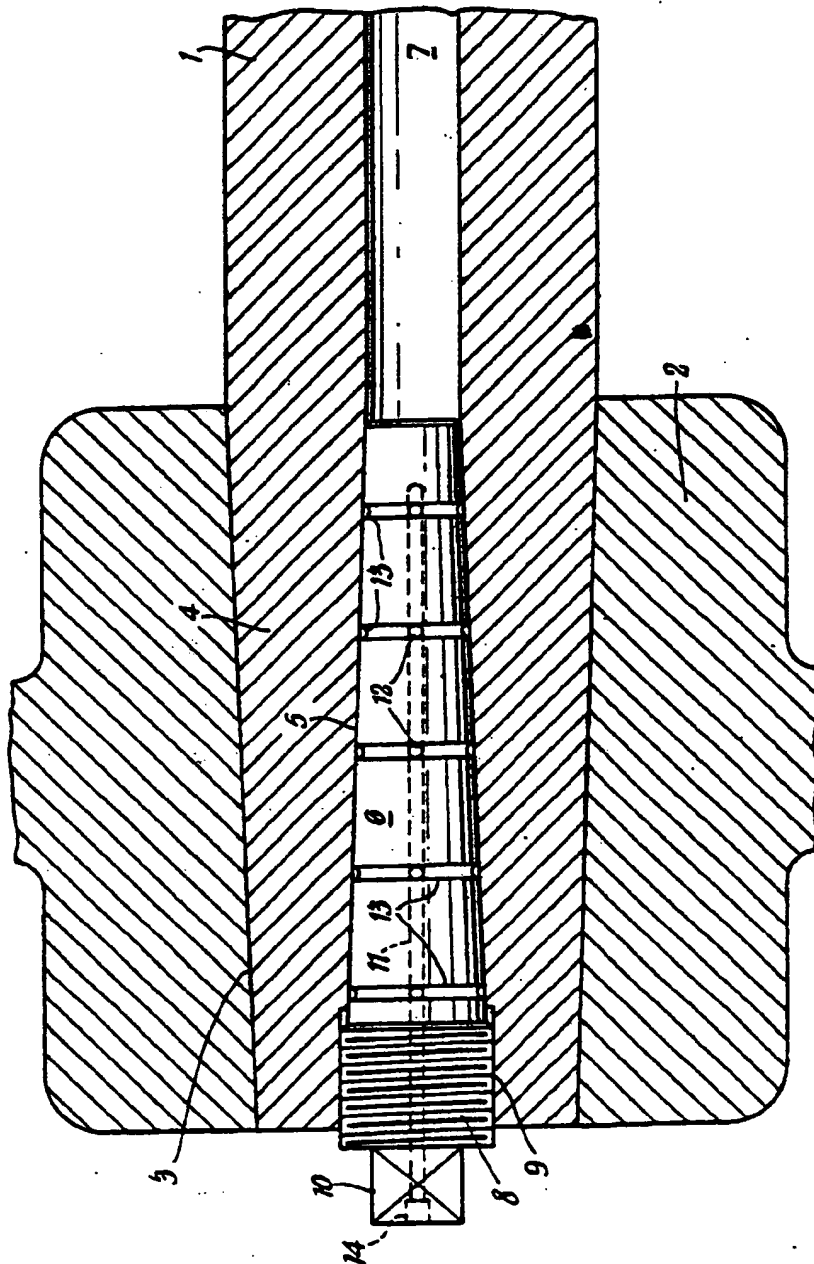

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**